

Model: **KM17M**

KOHLER POWER SYSTEMS

220-240 V

Diesel



Ratings Range

		KM17M 50 Hz
Standby:	kW	17
	kVA	17
Prime:	kW	15
	kVA	15



With Available Enclosure Accessory

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- A one-year limited warranty covers all systems and components.
- Mitsubishi engine with 12-volt battery charging alternator.
- Mecc Alte single-bearing alternator with insulation class H.
- Unit-mounted radiator with 50°C (122°F) ambient air capability.
- Skid and vibration isolators.
- Subbase fuel tank, 100 L (26 gal.).
- Dry type air filter.
- Main line circuit breaker.
- Microprocessor controller.
- Battery, battery rack, and cables.
- Industrial 9 dB(A) reduction exhaust silencer (loose).
- Operation and installation literature.

Generator Set Ratings

Alternator	Voltage	Ph	Hz	Standby Rating		Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps
	220	1	50	17/17	77	15/15	68
ECO28VL	230	1	50	17/17	74	15/15	65
	240	1	50	17/17	71	15/15	63

RATINGS: All single-phase units are rated at 1.0 power factor. See TIB-109 for generator set derate tables.

Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions.

PRP: Prime power is available for an unlimited number of annual operating hours in variable load applications in accordance with ISO-8528/1.

A 10% overload capability is available for a period of 1 hour within a 12-hour period of operating in accordance with ISO-3046/1.

ESP: The emergency standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO-8528/1. Overload is not allowed.

The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Specifications

- NEMA-MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards compliance for temperature rise and motor starting.
- Sustained short-circuit current greater than 300% of the rated current for up to 10 seconds.
- Self-ventilated and dripproof construction.
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.

Specifications	
Ratings voltage	230 V
Standby rating @ 27°C, kVA	33
Prime rating @ 40°C, kVA	30
Efficiency @ full load, %	84.8
Air flow, m ³ /min. (cfm)	5.3 (187)
Direct axis subtransient reactance (X"d), %	8.8

Specifications	Alternator
Manufacturer	Mecc Alte
Exciter type	Brushless
Leads: quantity, type	12, Reconnectable
Type	4-Pole, Rotating-Field
Voltage regulator	Solid State, SR7/2
Insulation:	NEMA MG1
Material	Class H
Bearing: quantity, type	1, Sealed
Coupling	Direct
Voltage regulation, no-load to full-load	±1%

Application Data

Engine

Engine Specifications	
Manufacturer	Mitsubishi
Engine model	S4Q2.SD
Engine type	4-Cycle, Naturally Aspirated
Cylinder arrangement	4 Inline
Displacement, L (cu. in.)	2.50 (153)
Bore and stroke, mm (in.)	88 x 103 (3.5 x 4.1)
Compression ratio	22:1
Piston speed, m/min. (ft./min.)	309 (1014)
Rated rpm	1500
Max. power at rated rpm, kWm (BHP)	23.9 (32)
Governor type	Mechanical
Frequency regulation, no-load to full-load	ISO 5%
Frequency regulation, steady state	±2.5%
Air cleaner type, all models	Dry

Exhaust

Exhaust System	
Exhaust manifold type	Dry
Exhaust flow at rated kW, m ³ /min. (cfm)	4.4 (157)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	600 (1112)
Maximum allowable back pressure, kPa (in. Hg)	6.7 (2.0)
Exhaust outlet size at engine hookup, mm (in.)	60.5 (2.38)

Engine Electrical

Engine Electrical System	
Battery charging alternator:	12 Volt
Ground (negative/positive)	Negative
Volts (DC)	12
Starter motor rated voltage (DC)	12
Battery, recommended cold cranking amps (CCA):	
Quantity, CCA rating each	One, 680
Battery voltage (DC)	12

Fuel

Fuel System	
Max. fuel flow, Lph (gph)	36 (9.5)
Fuel prime pump	Electric
Recommended fuel	#2 Diesel
Fuel tank capacity, L (gal.)	100 (26.4)

Lubrication

Lubricating System	
Type	Full Pressure
Oil pan capacity, L (qt.)	5.5 (6.0)
Oil pan capacity with filter, L (qt.)	6.5 (6.8)

Application Data

Cooling

Radiator System

Ambient temperature, °C (°F)	50 (122)
Radiator system capacity, including engine, L (gal.)	8.1 (2.1)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	19 (1080)
Water pump type	Centrifugal
Fan, kWm (HP)	0.8 (1.1)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H ₂ O)	0.1 (0.4)

Operation Requirements

Air Requirements

Radiator-cooled cooling air, m ³ /min. (scfm) *	48 (1695)
Combustion air, m ³ /min. (cfm)	1.7 (61)
* Air density = 1.20 kg/m ³ (0.075 lbf/ft ³)	

Fuel Consumption

Diesel, Lph (gph) at % load	Standby Rating
110% (standby rating)	6.8 (1.8)

Diesel, Lph (gph) at % load	Prime Rating
100% (of the prime rating)	6.2 (1.6)
75% (of the prime rating)	4.7 (1.2)
50% (of the prime rating)	3.4 (0.9)

Controller



Decision-Maker™ 1000

Automation

- Test LEDs
- Voltage and speed stabilization

Engine Parameters

- Engine speed indication (with LCD message)
- Battery voltage indication (with LCD message)
- Elapsed hour meter (with LCD message)
- Fuel solenoid control
- Starter control

Measurements

- Frequency, Hz (with LCD message)

Operation and/or Safety Lights

- Oil pressure fault
- Water temperature fault
- Fail to start fault
- Overspeed fault (≥60 kVA)
- Set ready for load
- Charging alternator fault
- General alarm
- General fault
- Panel lamp
- Emergency stop fault

Safety Devices

- Overspeed fault
- Automatic standby

Miscellaneous

- Fault reset

Available Accessories

Enclosed Unit

- Sound Enclosure M127, 61 dB(A) @ 7 m (23 ft.), Standby (with enclosed critical silencer)

Open Unit

- Exhaust Silencer, Critical 40 dB(A) Reduction
- Exhaust Silencer, Residential 29 dB(A) Reduction
- Extension, 40 cm (16 in.)
- Flexible Exhaust Connector
- Protection Mesh

Cooling System

- Block Heater [recommended for ambient temperatures below 0°C (32°F)]
- Radiator core guard

Controller

Automation

- External Starting Order
- Plug Preheating
- Remote Start Capability
- Utility Sensing, 3-Phase

Engine Parameters

- Plug Preheating Control
- Water Preheating Control

Measurements

- Analog Indicator
- Line Voltages, Volts
- Phase Currents, Amps
- Single Voltages, Volts

Safety Devices

- Overload or Short-Circuit Fault
- Differential Triggering Fault

Miscellaneous

- Alarm Horn
- Differential Protection with Time and Sensitivity Adjustment
- External ATS Position
- Permanent Insulation Controller

Fuel System

- Automatic Fuel Tank Fill Kit
- Subbase Fuel Tank with Secondary Containment Basin
- Subbase Fuel Tank Leak Alarm
- Water Separator Fuel Filter

Electrical System

- Battery Charger, Equalize/Float Type
- Battery Isolator Switch

Engine

- Air Cleaner, Heavy Duty (with air restriction indicator)
- Electronic Isochronous Governor
- Lube Oil Drain Pump

Miscellaneous Accessories

- _____
- _____
- _____
- _____
- _____


Dimensions and Weights

Open Model



Overall Size, L x W x H, mm (in.): 1700 x 896 x 1121 (67 x 35 x 44)
 Weight, wet, kg (lb.): 680 (1499)

With Available Enclosure Accessory

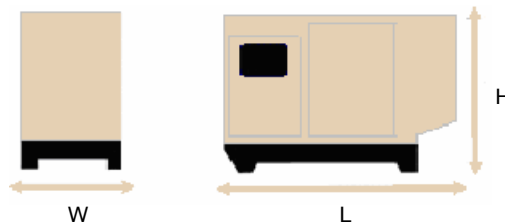

Overall Size, L x W x H, mm (in.): 2080 x 960 x 1415 (82 x 38 x 56)
 Weight, wet, kg (lb.): 910 (2006)

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY:

